


PADO

Référence de commande **6805050**



IP66 | CRI >75 | PF >0.9 | RG1 | SDCM <5 | LED | 3 YEARS

Source

LED type	SMD
LED brand	Sanan chip
Puissance	20-30-50W
Teinte	2200K-3000K-4000K
Sélecteur intégré	Teinte + puissance
Flux sortant système	2100 - 3150 - 5250
LM/W	110
Durée de vie	L70 B50 35.000H
Nombre de ON/OFF	>30 000

Alimentation

Alimentation	AC230V
Driver	Intégré
Dimmable	Non

Produit

Matériaux	Aluminium + verre
Finition	Noir mat
Peinture	Poudrage
Dimensions en mm	152x180x26
Test fil incandescent	650°C
Température de fonctionnement	-40 +45℃
Protection	Soupape anti-condensation


Optique

Angles	110°
Dispositif optique	Diffuseur verre opale

Installation


Précâblage	H05RN-F 3x1mm2 (1,5m)

Courbe 20W - 2200K

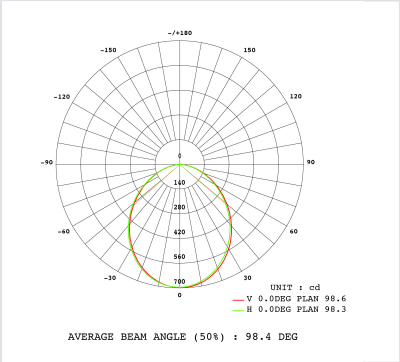


AVERAGE BEAM ANGLE (50%) : 98.4 DEG

Courbe 20W - 3000K

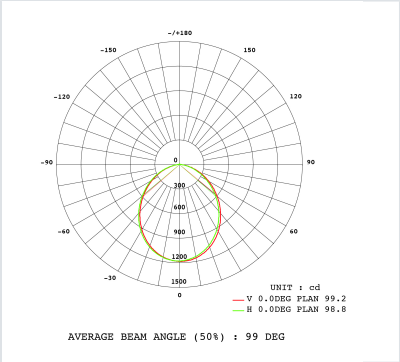


AVERAGE BEAM ANGLE (50%) : 99 DEG

Courbe 20W - 4000K

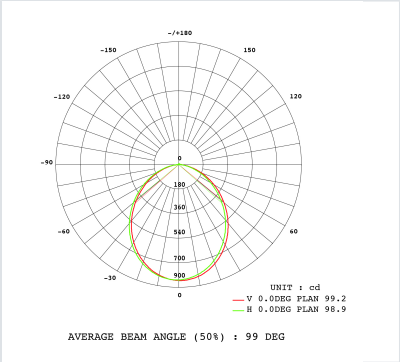


AVERAGE BEAM ANGLE (50%) : 99 DEG

Courbe 30W - 2200K

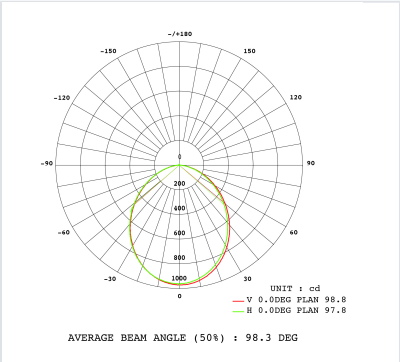


AVERAGE BEAM ANGLE (50%) : 98.3 DEG

Courbe 30W - 3000K

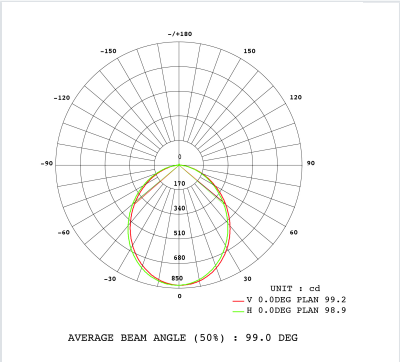


AVERAGE BEAM ANGLE (50%) : 99.0 DEG

Courbe 30W - 4000K

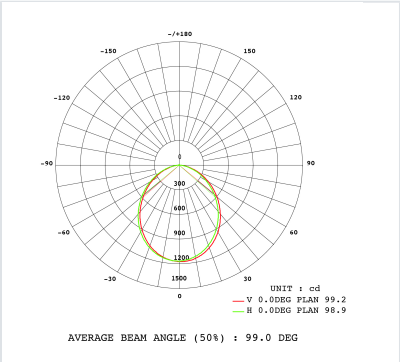


AVERAGE BEAM ANGLE (50%) : 99.0 DEG

Courbe 50W - 2200K

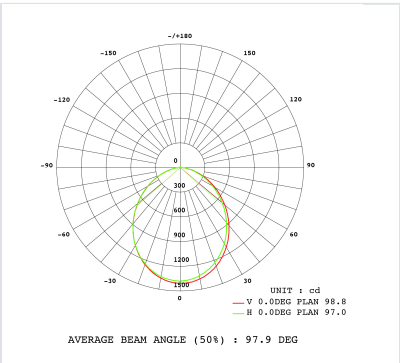

AVERAGE BEAM ANGLE (50%) : 97.9 DEG

Courbe 50W - 3000K

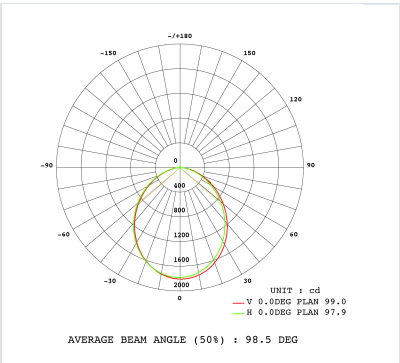

AVERAGE BEAM ANGLE (50%) : 98.5 DEG