



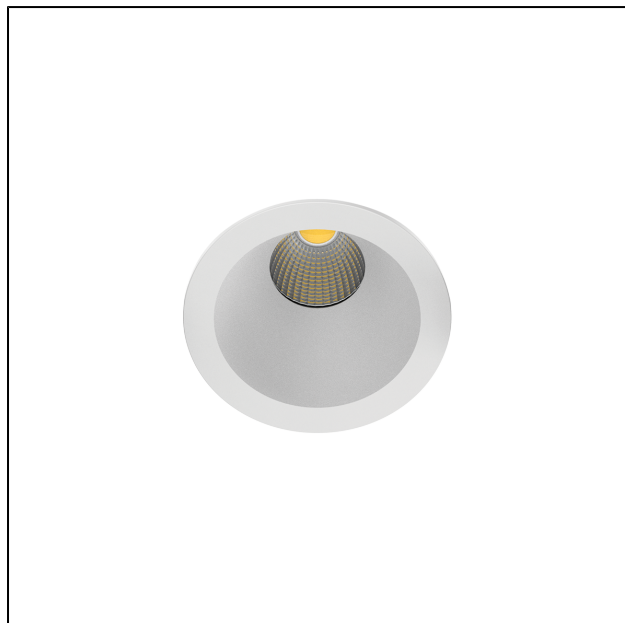

MINO

Order reference

6200100



Light Source

LED type	COB
Power	6W
Colour temperature	2700K-3000K-4000K
Integrated selector	Colour temperature
System output flux	364 - 412 - 430 lm
Lifetime	L80 B20 70.000H
Number of ON/OFF	100 000

Power Supply

Power supply	AC230V
Driver	Incl.
Driver current	250mA
Dimmable	Yes
Dimming method	TRIAC

Product

Materials	Aluminium + PC
Finish	Matte white
Shape	Round
Dimensions in mm	Ø50x57,6
Glow-wire test	650°
Operating temperature	-20°C / +40°C
Norme	NF C15-100 (IP5X); DTU 45.11

Optics


Angles	30°
Optical system	Lentille

Installation


Mounting	Ressorts
Recessed mounting	Ø42mm
Connection	Bornier automatique avec repiquage
Coverable	All insulation types



Courbe 2700K

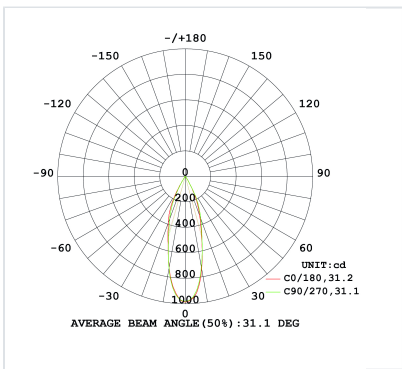

Courbe 3000K

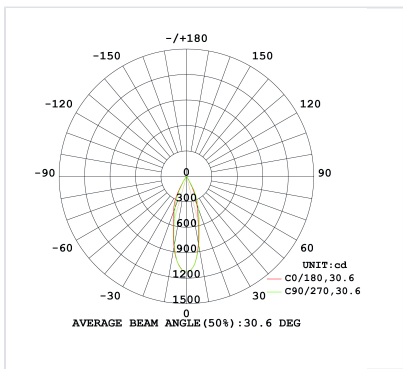

Courbe 4000K

