



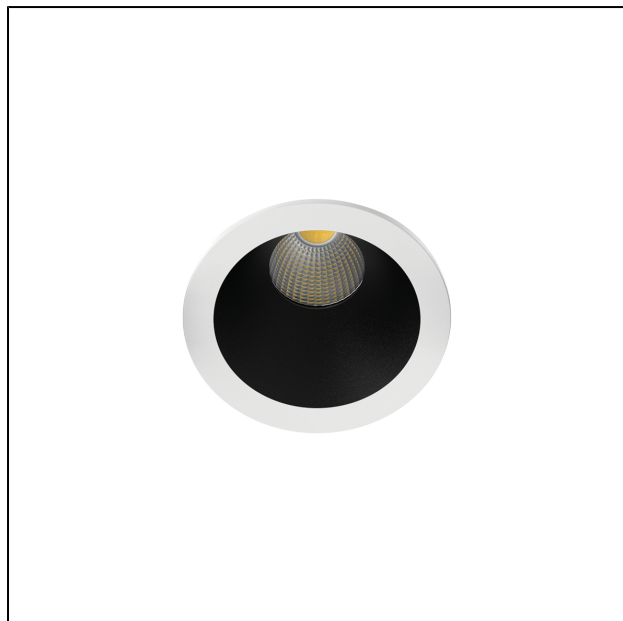

## MINO

Order reference

**6200101**



### Light Source

|                     |                    |
|---------------------|--------------------|
| LED type            | COB                |
| Power               | 6W                 |
| Colour temperature  | 2700K-3000K-4000K  |
| Integrated selector | Colour temperature |
| System output flux  | 364 - 412 - 430 lm |
| Lifetime            | L80 B20 70.000H    |
| Number of ON/OFF    | 100 000            |

### Power Supply

|                |        |
|----------------|--------|
| Power supply   | AC230V |
| Driver         | Incl.  |
| Dimmable       | Yes    |
| Dimming method | TRIAC  |

### Product

|                       |                              |
|-----------------------|------------------------------|
| Materials             | Aluminium + PC               |
| Finish                | White - Matte black          |
| Shape                 | Round                        |
| Dimensions in mm      | Ø50x57,6                     |
| Glow-wire test        | 650°                         |
| Operating temperature | -20°C / +40°C                |
| Norme                 | NF C15-100 (IP5X); DTU 45.11 |

### Optics


|                |          |
|----------------|----------|
| Angles         | 30°      |
| Optical system | Lentille |

### Installation


|                   |                                    |
|-------------------|------------------------------------|
| Mounting          | Ressorts                           |
| Recessed mounting | Ø42mm                              |
| Connection        | Bornier automatique avec repiquage |
| Coverable         | All insulation types               |



Courbe 2700K

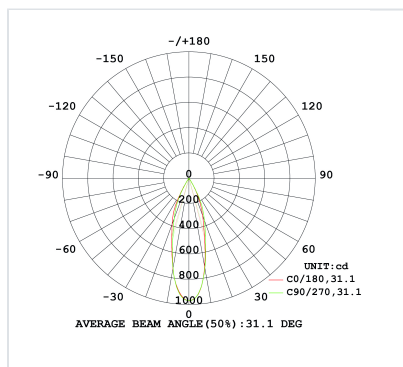

Courbe 3000K

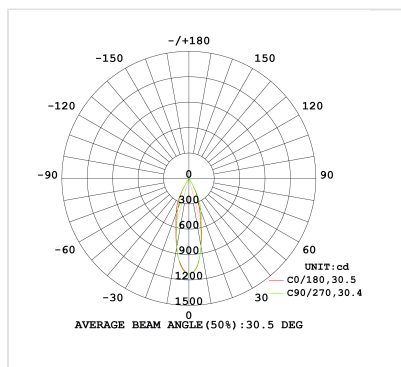

Courbe 4000K

