



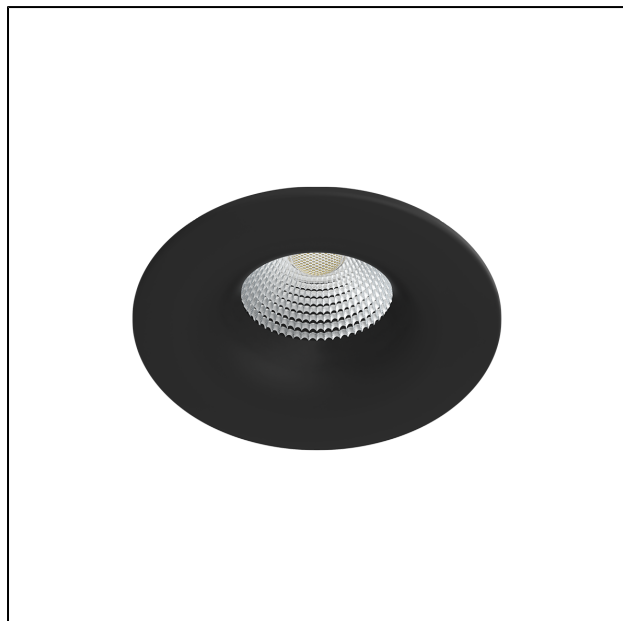

DOPO

Order reference

6201002



Light Source

LED type	SMD
Power	6W
Colour temperature	2700K-3000K-4000K
Integrated selector	Colour temperature
System output flux	460 - 550 - 510lm
Lifetime	L80 B20 43.000H
Number of ON/OFF	100 000

Power Supply

Power supply	AC230V
Driver	Integrated
Dimmable	Yes
Dimming method	TRIAC

Product

Materials	Polycarbonate
Finish	Matte black
Dimensions in mm	Ø90x58
Glow-wire test	650°C
Operating temperature	-20°C +40°C
Norme	NF C15-100 (IP5X); DTU 45.11

Optics


Angles	40°
Optical system	Réflecteur dichroïque

Installation


Mounting	Ressorts
Recessed mounting	Ø 65-70mm
Connection	Bornier automatique avec repiquage (65x44x24 mm)
Coverable	All insulation types



Courbe 2700K

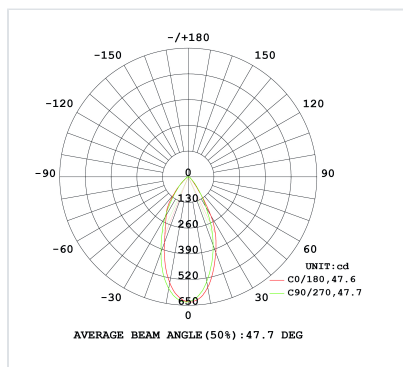

Courbe 3000K

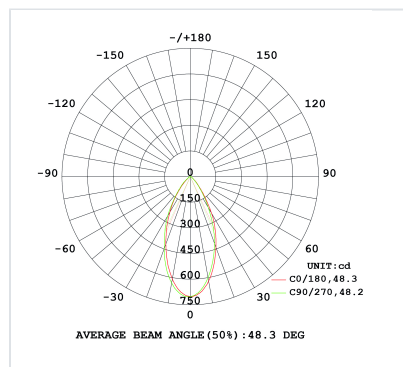

Courbe 4000K

