




BANO

Order reference

6201063



Light Source

LED type	SMD
Power	5-7W
Colour temperature	2700K-3000K-4000K
Integrated selector	Colour temperature + Power
System output flux	De 500 à 740
LM/W	100lm
Lifetime	L80 B20 50.000H
Number of ON/OFF	100 000

Power Supply

Power supply	AC230V
Driver	Incl.
Dimmable	Yes
Dimming method	TRIAC

Product

Materials	Polycarbonate
Finish	Brushed chrome
Shape	Round
Orientation	25°
Dimensions in mm	Ø82 x 35,8
Glow-wire test	650°
Operating temperature	-20°C / +40°C
Norme	NF C15-100 (IP5X); DTU 45.11

Optics


Angles	50°
Optical system	Lentille

Installation


Mounting	Ressorts
Recessed mounting	Ø68 - 70 mm
Connection	Bornier automatique avec repiquage
Coverable	All insulation types




Courbe 5W - 2700K

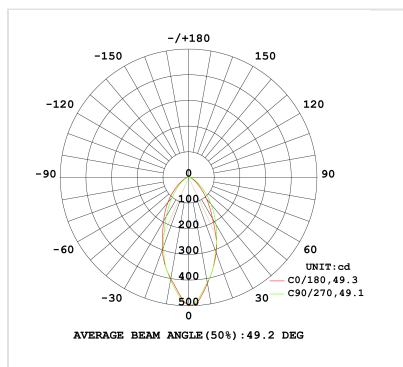


Courbe 5W - 3000K

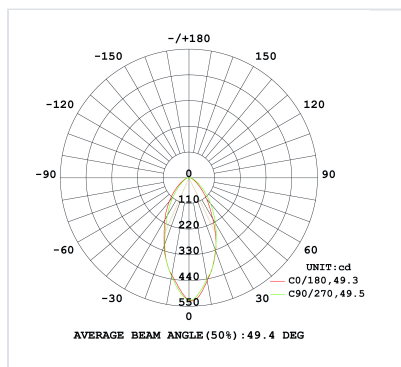


Courbe 5W - 4000K

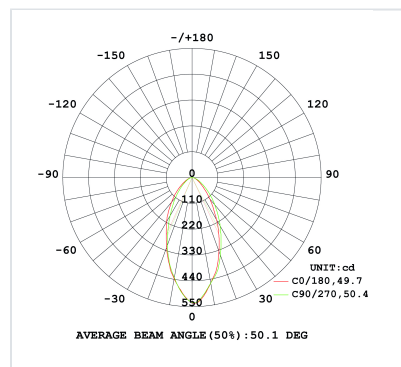

Courbe 7W - 2700K

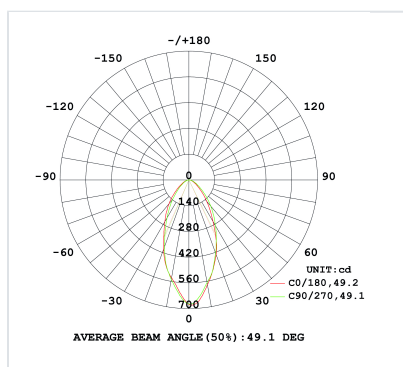

Courbe 7W - 3000K

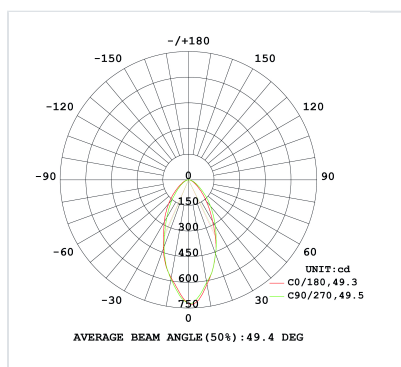

Courbe 7W - 4000K

