



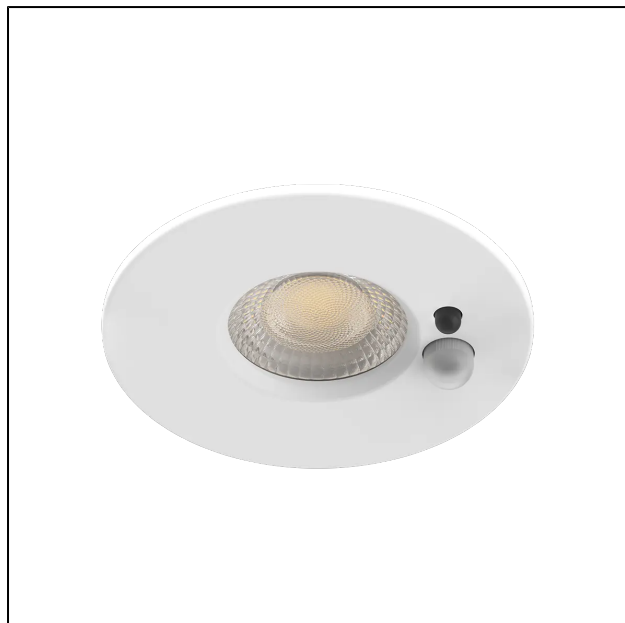

6202024

Order reference

6202024



Light Source

LED type	SMD
Power	6W
Colour temperature	2200K-3000K-4000K
Integrated selector	Colour temperature
System output flux	517 - 568 - 568 lm
Lifetime	L80 B20 70.000H

Power Supply

Power supply	AC230V
--------------	--------

Product

Materials	Aluminium
Finish	Matte white
Dimensions in mm	Ø82x29,2
Detection distance	Réglable de 0,1M à 2M
Hold time	Temporisation de 10 secondes à 10 minutes
Dusk detection	3 réglages: 50lux - 200lux - 3000lux
Glow-wire test	650°C
Operating temperature	-20°C +40°C
Inner ring	Interchangeable magnetic ring
Norme	NF C15-100 (IP5X); DTU 45.11

Optics


Angles	60°
Optical system	Lentille

Installation


Mounting	Ressorts
Recessed mounting	Ø 68-70mm
Connection	Bornier automatique avec repiquage
Coverable	All insulation types



Courbe 2700K

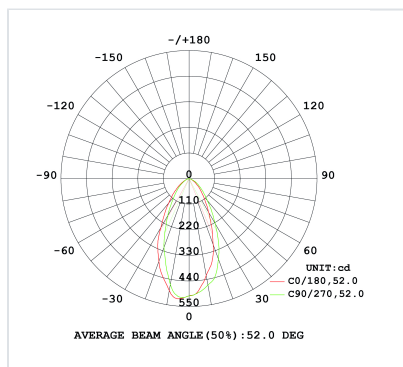

Courbe 3000K

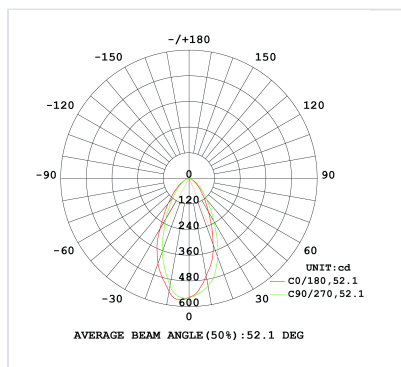

Courbe 4000K

