




IXO

Order reference

620T05BK



Light Source

LED type	SMD
Power	5W
Colour temperature	2700K-3000K-4000K
Integrated selector	Colour temperature
System output flux	470 - 495 - 520lm
Lifetime	L80 B20 43.000H
Number of ON/OFF	100 000

Power Supply

Power supply	AC230V
Driver	Integrated
Dimmable	Yes
Dimming method	TRIAC

Product

Materials	Polycarbonate
Finish	Matte black
Orientation	40°
Dimensions in mm	Ø90x56
Glow-wire test	650°C
Operating temperature	-20°C +40°C
Norme	NF C15-100 (IP5X); DTU 45.11

Optics


Angles	60°
Optical system	Lentille

Installation


Mounting	Ressorts
Recessed mounting	Ø65-70mm
Connection	Bornier automatique avec repiquage (65x21x23 mm)
Coverable	All insulation types



Courbe 2700K

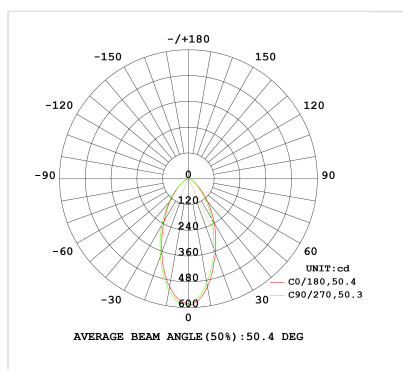

Courbe 3000K

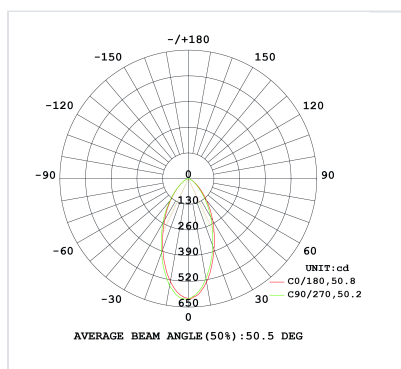

Courbe 4000K

